

New Heuristic Algorithm for Flow Shop Scheduling with n-Jobs, Three Machines, and Two Robots Considering the Breakdown Interval of Machines and Robots Simultaneously

Mahdi Eghbali^{a,*}, Mohammad Saidi Mehrabad^b, Hassan Haleh^c

^aMSc Student, Department of Industrial and Mechanical Engineering, Qazvin Branch, Islamic Azad University, Qazvin, Iran

^bProfessor, Department of Industrial Engineering, Iran University of Science and Technology, Narmak, Tehran, Iran

^cAssistant Professor, Department of Industrial and Mechanical Engineering, Qazvin Branch, Islamic Azad University, Qazvin, Iran

Received 05 April 2013; Revised 03 December 2014; Accepted 24 June 2015

Abstract

In flow shop scheduling, the objective is to obtain a sequence of jobs which will optimize some well-defined criteria when processed in a fixed order of machines. In situations that robots are used to transport materials (material handler), breakdown of the machines and robots have a significant role in the production concern. This paper deals with a new heuristic algorithm for n-jobs, 3 machines, and 2 robots flow shop scheduling problem considering the breakdown interval of machines and robots simultaneously. This algorithm is based on Johnson algorithm. A heuristic algorithm is used to minimize total elapsed time, whenever mean weighted production flow time is taken into consideration. The proposed method is very easy to understand. Also, it provides an important tool for decision-makers. Furthermore, a numerical illustration is given to clarify the algorithm.

Keywords: Scheduling problems, Robots, Breakdown interval, Flow shop.

1. Introduction

The flow shop scheduling problem is one of the most popular machine scheduling problems with extensive engineering relevance (Wang et al., 2012). In flow shop scheduling problems, the objective is to obtain a sequence of jobs which will optimize some well-defined criteria when processed on the machines. Every job will go on these machines in a fixed order of machines.

The number of possible schedules of the flow shop scheduling problem involving n-jobs and m-machines is $(m!)^n$. Every job will go on these machines in a fixed order of machines. Early research on flow shop problems is based mainly on Johnson's theorem, which gives a procedure for finding an optimal solution with 2 machines, or 3 machines with certain characteristics.

Johnson (1954) presented the algorithm for obtaining an optimal schedule, which minimizes makespan for n-jobs, two-machine problem, three-machine problem (for particular cases of n-jobs). The scheduling problem practically depends upon important factors, namely transportation time, breakdown effect, relative importance of a job over another job, etc. These concepts were studied by Ignall and Schrage (1965), Palmer (1965), Lomnicki (1965), Bestwick and Hastings (1976), Dannenbring (1977), Yoshida and Hitomi (1979), Nawaz et al. (1983), Sarin and Lefoka (1993), Koulamas (1998),

Temiz and Erol (2004), etc. Heydari Poordarvish (2003) dealt with a flow shop scheduling problem where n jobs are processed in two disjoint job blocks in a string consisting of one job block in which order of jobs is fixed and other job block in which order of jobs is arbitrary. Lomnicki (1965) introduced the concept of flow shop scheduling with the help of branch and bound method. Further, the work was developed by Ignall and Schrage (1965), Brown and Lomnicki (1966), Chandrasekharan (1992) with the branch and bound technique to the machine scheduling problem by introducing different parameters. Singh et al. (2005) studied the optimal two-stage production schedule in which processing time and set-up time were both associated with probabilities including job block criteria. The concept of transportation time is very important in scheduling. Transportation can be done by robots. In situations that robots are used to transport materials (material handler), breakdown of the machines and robots has a significant role in the production issue. The concept of breakdown interval becomes very significant in the production process where a machine, while processing the jobs, gets a sudden breakdown due to failure of a component of machines for a certain interval of time, or the machines are supposed to stop their work for a certain interval of time due to some external imposed policies; for instance, cessation of the flow of electric current to the machines may be a

* Corresponding author Email address: iemehdieghbali@gmail.com

Step 1: Calculate the $\sum (FR_{i1} + BR_{i1})$ and $\sum (FR_{i2} + BR_{i2})$.

Step 2: Check the structural condition

Max $[A_{i1} + \sum (FR_{i1} + BR_{i1})] \geq$ Min $[A_{i2} + \sum (FR_{i1} + BR_{i1})]$
or

Max $[A_{i3} + \sum (FR_{i2} + BR_{i2})] \geq$ Min $[A_{i2} + \sum (FR_{i2} + BR_{i2})]$
or both.

If these structural conditions are satisfied, then go to step 3, else the data are not in standard form to use Johnson algorithm.

Step 3 : Introduce two fictitious machines G and H with processing times G_i and H_i as given below:

$$G_i = | A_{i1} - A_{i2} - \sum (FR_{i1} + BR_{i1}) - \sum (FR_{i2} + BR_{i2}) |$$

$$H_i = | A_{i3} - A_{i2} - \sum (FR_{i1} + BR_{i1}) - \sum (FR_{i2} + BR_{i2}) |$$

Step 4: Compute *Minimum* (G_i, H_i)

If *Min* (G_i, H_i) = G_i , then define $G'_i = G_i + w_i$ and $H'_i = H_i$.

If *Min* (G_i, H_i) = H_i , then define $G'_i = G_i$ and $H'_i = H_i + w$.

If *Min* (G_i, H_i) = $H_i = G_i$, then define $G'_i = G_i + w$, $H'_i = H_i$.
or $G'_i = G_i$, and $H'_i = H_i + w$ arbitrarily

Step 5: Define a new reduced problem with G'' and H'' , where

$$G'' = G / w, H'' = H / w \quad i = 1, 2, 3, \dots, n$$

Step 6: Using Johnson's procedure, obtain all the sequences for S_k by having minimum elapsed time. Let us call these be S_1, S_2, \dots, S_r

Step 7: Prepare In-Out tables for the sequences S_1, S_2, \dots, S_r obtained in step 6. Let the mean flow time be minimum for sequence S_k .

Step 8: Form a modified problem with processing time $A'_{ij}, FR'_{i1}, BR'_{i1}, FR'_{i2},$ and $BR'_{i2}; i = 1, 2, 3, \dots, n; j = 1, 2, 3$.

Step 8.1: effect of machine breakdown interval

If the machine breakdown interval $L_M = (a, b)$ has effect on job I , then $A'_{ij} = A_{ij} + L_M$. Where $L_M = b - a$, the length of machine breakdown interval

If the breakdown interval $L_M = (a, b)$ has no effect on i th job, then $A'_{ij} = A_{ij}$.

Step 8.2: effect of robot's breakdown interval

If the robot's breakdown interval $L_R = (c, d)$ has effect on robots 1 or 2 or both, then $FR' = FR + L_R$ or $BR' = BR + L_R$ or both; Where $L_M = d - c$, the length of machine breakdown interval.

If the robot's breakdown interval $L_R = (c, d)$ has no effect on i th job, then $FR' = FR$ or $BR' = BR$ or both.

Step 9: Repeat the procedure to get the optimal sequence for the modified scheduling problem using steps 2 to 6. Determine the total elapsed time.

Step 10: Find the performance measure studied in weighted mean flow time defined as $F = \frac{\sum_{i=1}^n w_i f_i}{\sum_{i=1}^n f_i}$, where f_i is flow time of i th job.

4. Numerical Example

In this section, we provide one numerical example and the proposed algorithm is compared with the two results.

Consider the following flow shop scheduling problems of 5 jobs and 3 machines, in which the processing time, robot forward and backward transportation times, and weight of jobs are given in Table 1, (Gupta (2012)). Machine breakdown interval is $L_M = (30, 35)$, and robot's breakdown interval is $L_R = (17, 20)$.

Find optimal or near-optimal sequence and also calculate the total elapsed time and mean weighted flowtime.

Solution:

Step 1: The results of step 1 are shown in Table 2.

Step 2: considering Table 3, the structural conditions of step 2 are satisfied.

Table 1
The expected processing times for the machines and robots

Jobs i	A_{i1}	FR_1	BR_1	A_{i2}	FR_2	BR_2	A_{i3}	w_i
1	16	4	2	18	3	1	12	2
2	12	5	3	14	5	3	12	4
3	10	3	1	11	4	2	14	3
4	14	4	2	10	6	4	12	5
5	12	6	4	12	4	2	10	1

Table 2
The results of step 1

job i	A_{i1}	FR_1	BR_1	$\Sigma(FR_1 + BR_1)$	A_{i2}	FR_2	BR_2	$\Sigma(FR_2 + BR_2)$	A_{i3}	w_i
1	16	4	2	6	18	3	1	4	12	2
2	12	5	3	8	14	5	3	8	12	4
3	10	3	1	4	11	4	2	6	14	3
4	14	4	2	6	10	6	4	10	12	5
5	12	6	4	10	12	4	2	6	10	1

Table 8
The data of modified problem

job i	M ₁	FR ₁	BR ₁	M ₂	FR ₂	BR ₂	M ₃	w _i
	A _{i1}			A _{i2}			A _{i3}	
1	16	4	2	23	3	1	12	2
2	17	8	3	14	5	6	12	4
3	10	3	1	11	7	2	14	3
4	14	4	2	10	6	4	12	5
5	12	6	4	12	4	2	10	1

Table 9
The In-Out flow table for the modified scheduling problem

Job i	M ₁		FR ₁ Interval	FR ₁	BR ₁ Interval		BR ₁	M ₂		FR ₂ Interval		FR ₂	BR ₂ Interval		BR ₂	M ₃		w _i	
	In	Out			In	Out		Interval	Interval	In	Out		Interval	Interval		In	Out		
2	0	17	0	8	8	8	11	3	25	39	0	5	5	5	11	6	44	56	2
1	17	33	11	15	4	15	17	2	39	62	11	14	3	14	15	1	65	77	1
5	33	45	17	23	6	23	29	4	62	74	15	19	4	19	21	2	78	88	4
3	45	55	29	32	3	32	33	1	74	85	21	28	7	28	30	2	92	106	3
4	55	69	33	37	4	~	~	~	85	95	30	36	6	~	~	~	106	118	5

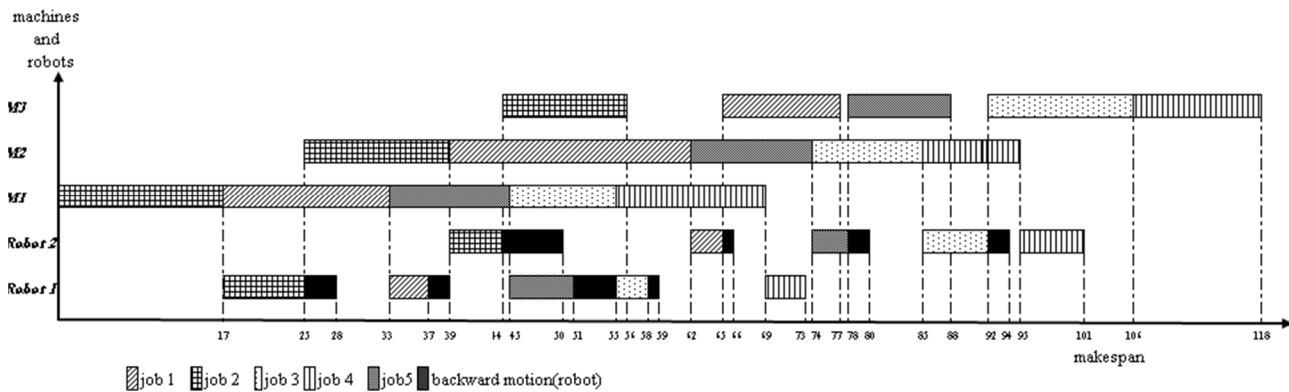


Fig. 3. Gantt chart after the effect of machine breakdown interval and robot's breakdown interval

Finally, the proposed algorithm is compared with the simulation results without considering the effect of machine and robot's breakdown interval. It should be noted that in simulation, breakdown intervals are uniformly distributed. In simulation method calculation, these results are the average of 20 run times. The data for rest of the problems in this section are obtained similar to those of numerical example are given. In this section final results are shown in Table 10.

5. Conclusion

In this paper, we proposed a new heuristic solution based on the flow shop scheduling problem (number of machine =3) in which the effects of machine and robot's breakdown interval are considered simultaneously. Mentioned algorithm sequence the jobs which minimizes the total elapsed time, whenever mean weighted production flow time is taken into consideration. We compared the results with simulation without

considering machine breakdown. Also, it is done by assumption of having 3 machines and 2 robots.

Table 10
Result of the proposed algorithm with the methods

Number of jobs	Total elapsed time		Average elapsed time
	Without breakdown	With breakdown	Simulation
2	77	64	70
3	96	85	91
4	108	97	103
5	118	107	110

References

Bestwick, P.F. & Hastings, N.A.J., (1976). A new bound for machine scheduling. *Operational Research Quarterly*, 27, 479-490.
 Brown, A.P.G. & Lomnicki, Z.A., (1966). Some applications of the branch and bound algorithm to the machine scheduling problem. *Operational Research Quarterly*, 17, 173-182.
 Chandramouli, A.B., (2005). Heuristic approach for N job 3 machine flow shop scheduling problem involving

